



Environment Publish

Environment=500mm

REVISED
25/04/2005

Environment Computation Specification		
Products Selected		
ATCNSE_0006 - FLEXIBLE CHAINS IN SECTOR 15 FOR - LAR END-CAP CALORIMETER	ZHB_0001 - HB GLOBAL ENVELOPE - AND LOCATION OF INTERFACES	389.00
	NH_0005 - HB BARREL RAIL SYSTEM - SIMPLIFIED 3-D OBJECT	389.98
	VHB_0006 - ASSEMBLY OF RAILS - DETAILED MODEL FOR STANDARDS	389.98
	NLE_0003 - END-CAP CALORIMETER - TRACK SYSTEM - SIDE C	268.47
	NMA_0008 - BARREL PROJECTIVE ALIGNMENT. - SIMPLE 3-D MODEL. SECTOR 15	488.24
	NMA_0018 - SECTOR 16 SIDE C (A) - REFERENCE ALIGNMENT SYSTEM AND	419.26

Computation Result:





Minimum Distance Publish

Minimum Distance Computation Specification	
Products Selected	
NSE_0006 - FLEXIBLE CHAINS IN SECTOR 15 FOR - LAR END- CAP CALORIMETER	NSO_0019 - UX15 - TILECAL. & LIQ.AR COOL PIPES - SUPPORTS ON HS STRUCTURE

Computation Result:

NSE_0006	NSO_0019	Minimum distance	Value=43.02mm	Not inspected
----------	----------	------------------	---------------	---------------

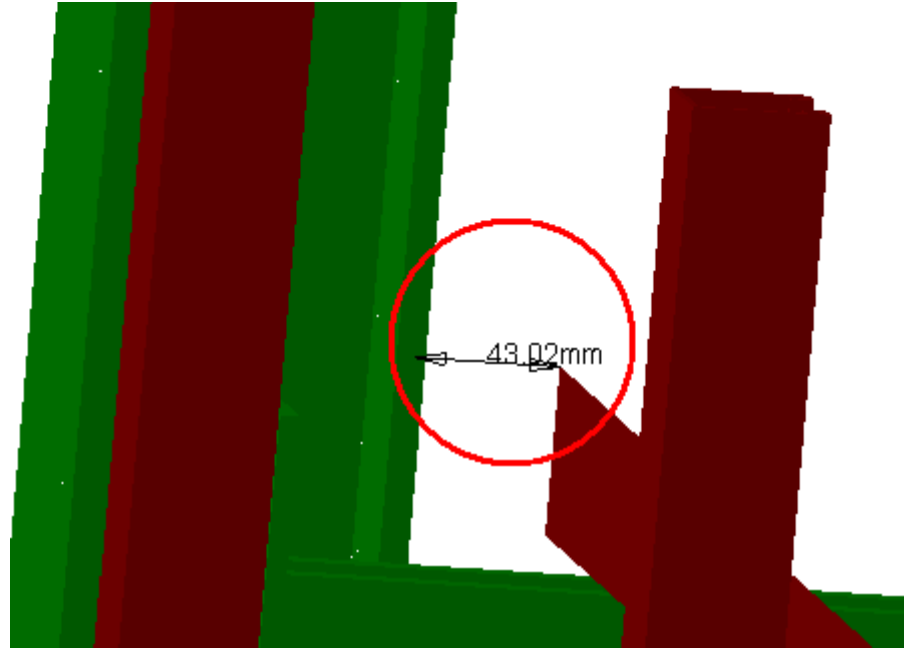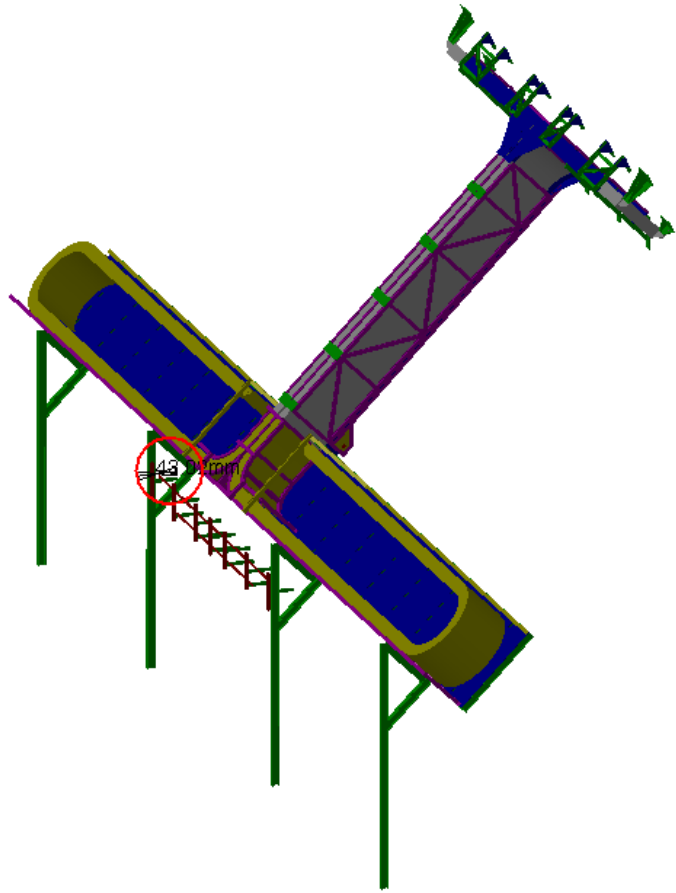

Side C
Sector 15